

AMREX®

SynchroSonic® US/752

Combination Ultrasound/High Volt Galvanic/High Volt Stimulator



Precise, Managed Combination Therapy

The SynchroSonic US/752 offers the benefits of therapeutic ultrasound and high volt muscle stimulation for muscle rehabilitation, prevention of muscle atrophy, pain management and edema reduction.

SynchroSonic US/752

The panel design of the SynchroSonic US/752 provides simple operation of ultrasound and high volt muscle stimulation separately or in combination through the ultrasound transducer. The practitioner can precisely manage treatment with a selectable frequency range, selectable independent on/off surge duration and selectable pulse width. The US/752 produces pulsation, tetanize, surge and reciprocal output. The additional benefit of bipolar application

eliminates the need for a single large dispersive electrode. Designed to promote patient assurance, the treatment stop switch allows the patient to discontinue stimulator output at the press of a button.

Soundhead Features and Options

All Amrex ultrasound transducers are lightweight, ergonomically designed and sealed for underwater therapy.

Amrex offers two soundhead faceplate sizes: the standard 2.25" diameter faceplate or the optional, small 1.5" diameter faceplate. The QuickConnect™ Transducer Cable System is optional with the standard soundhead. It is provided with the small soundhead or the dual standard/small soundhead on all Amrex ultrasound equipment.

SynchroSonic® US/752 Specifications



SynchroSonic U/HVG50 with optional three shelf utility cart

Input Power Requirements

Line Voltage 120 Vac, 60 Hz
(Special voltage available on request)


Current 1.0 A
Line Leakage < 50 µA

Ultrasonic Generator

(Complies with FDA Regulation 21 CFR 1050.10 and FCC Regulations)

Frequency 1.0 MHz ± 5%
Waveform amplitude modulated at 120 Hz ± 1%

AMPLITUDE MODULATED AT 120 Hz.

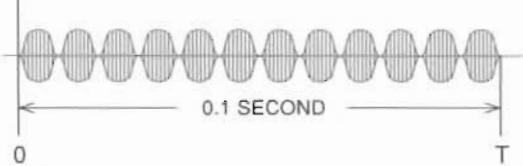

Pulse Duration 8 ms ± 1%
Output Mode adjustable interrupted & non-interrupted
Output Power 0 to 20 W total ± 20%
0 to 5 W/cm² ± 20%

Temporal Peak/Temporal Average Intensity 2.8:1± 20%
Treatment Timer adjustable 0 to 30 minutes

Applicator (Transducer)

Crystal Material barium-titanate
Applicator Beam Type collimating
Frequency 1.0 MHz ± 5%
ERA (Effective Radiating Area) 4 cm² ± 20%
BNR (Beam Nonuniformity Ratio) 5.5:1 maximum
Small Faceplate Size 1.5" diameter
Standard Faceplate Size 2.25" diameter

Ultrasound Features


- Lightweight standard transducer
- Optional QuickConnect™ transducer
- Optional small transducer with QuickConnect cable
- Cable fault alarm system
- Transducer protection switch
- Adjustable interrupted output mode
- 0 to 20 watt output • 30 minute timer

Stimulator Features

- Dual channel, 4 pad stimulator
 - Dual intensity controls
 - Polarity control
 - Bipolar application (no dispersive pad)
 - Selectable frequency, pulse width, on/off surge duration
 - Surge and reciprocal modes ramped
 - Intensity reset circuit
 - Patient treatment stop switch
 - Combination therapy capability
- Two Year Warranty - Generator - Parts and Labor
• One Year Warranty - Transducer - Parts and Labor

Electrical Stimulator

Waveform dc "needle" pulses with no parasitic spike

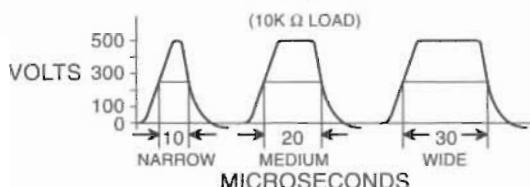

Output Voltage 0 to 500 peak V
Output Intensity 20 µC maximum charge per pulse into 100 Ω load

Pulse Width narrow 10 µs, medium 20 µs, wide 30 µs
Frequency Range 1 to 160 pulses per s
Surge On Duration, Reciprocal On/Off Duration..... 1, 2.5, 5, 7.5, 10, 15, 20, 30 s

Surge Off Duration 2.5, 5, 10, 15, 20, 30, 50, 90 s

Instrument US/752

Overall Dimensions 19½" W x 11" D x 7" H
Weight (including transducer) 20 lbs.

Shipping Weight 27 lbs.

Ordering Information US/752

Standard Soundhead	32-US/752
Standard QuickConnect Soundhead	32-US/752-D
Small QuickConnect Soundhead	32-US/752-SM
Standard/Small QuickConnect Soundhead	32-US/752-D2
Wall Mount Bracket	9-WB
High Impact Plastic Utility Cart	4-APS-2000
Paddle Electrode	2-PES
Treatment Handle	2-118
Flextrode® 8" x 10" Dispersive Electrode	2-F106

Caution: Federal law (USA) restricts this device to sale by or on the order of a licensed practitioner

AMREX®
electrotherapy equipment
a division of Amrex-Zetron, Inc.

7034 Jackson Street, Paramount, California 90723 (800) 221-9069 or (310) 527-6868 FAX (310) 366-7343
Web Site <http://www.amrexusa.com>

E-Mail amrex@amrex-zetron.com

Revised 8/12